


SETUP INSTRUCTIONS

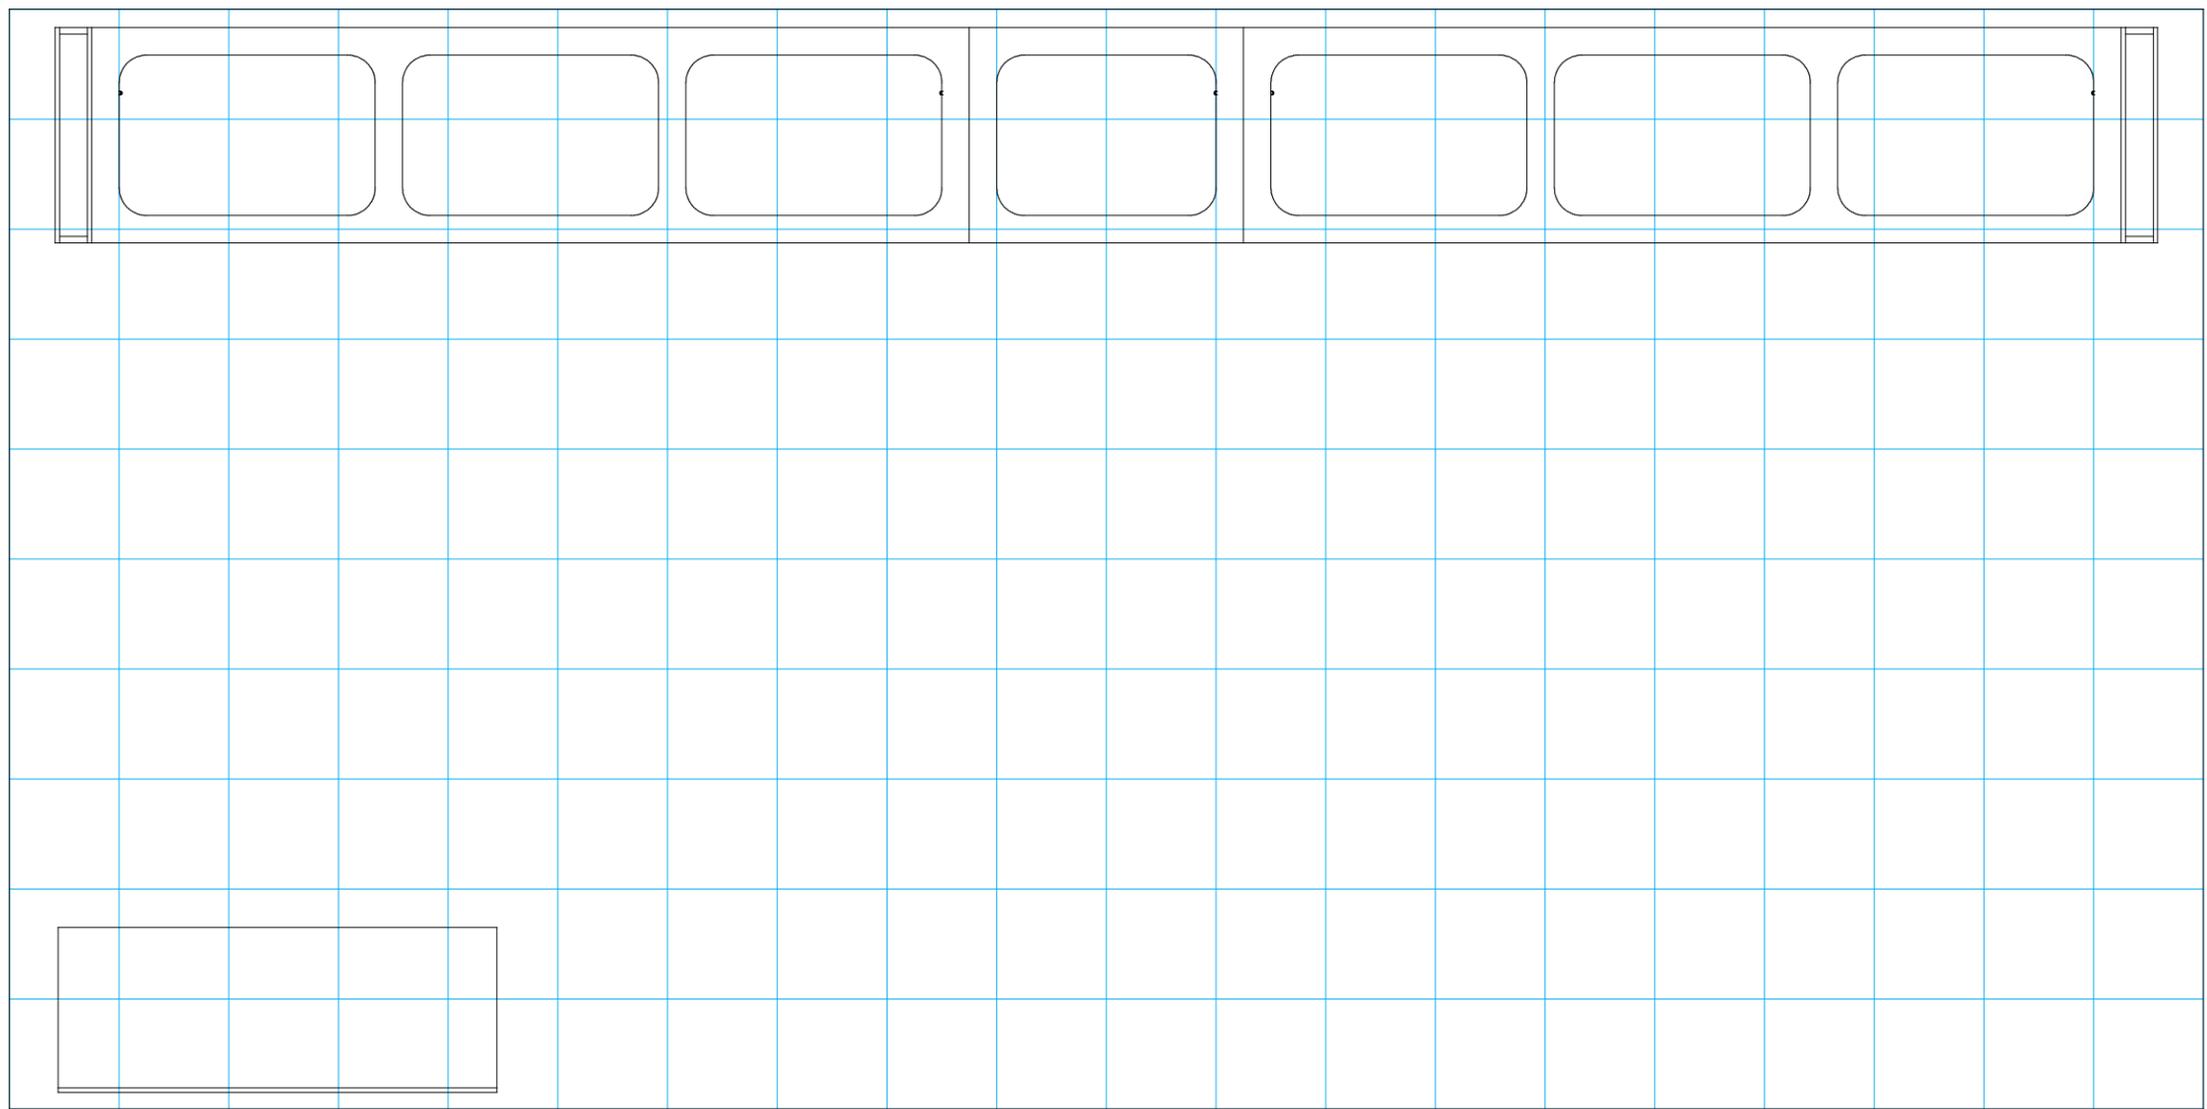

 = 1 sq foot

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

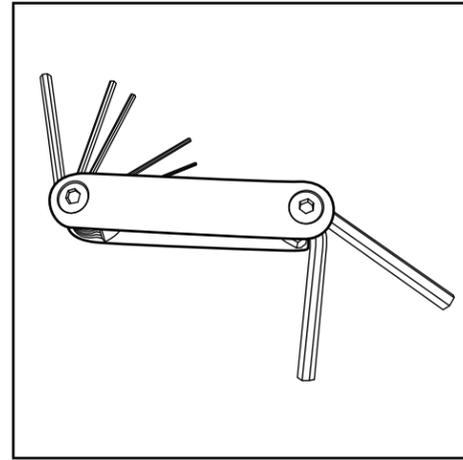


Hex Tool - Essential for Assembly

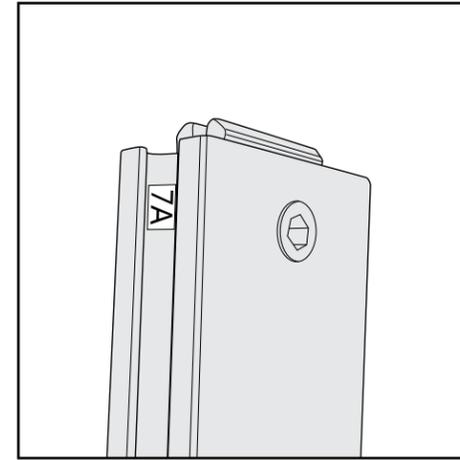


Part Identification - Numbering

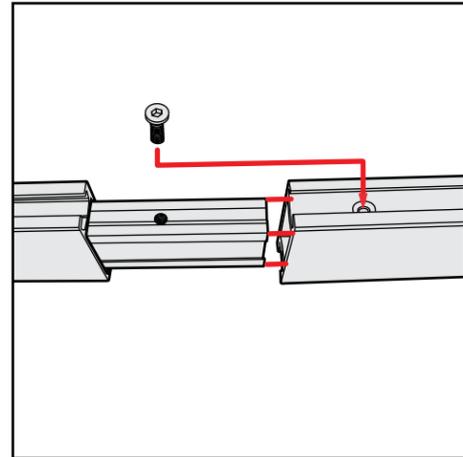


Spline Connection

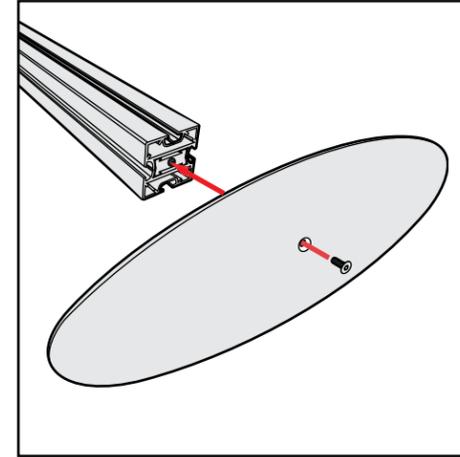

Base Plate & Extrusion Connection

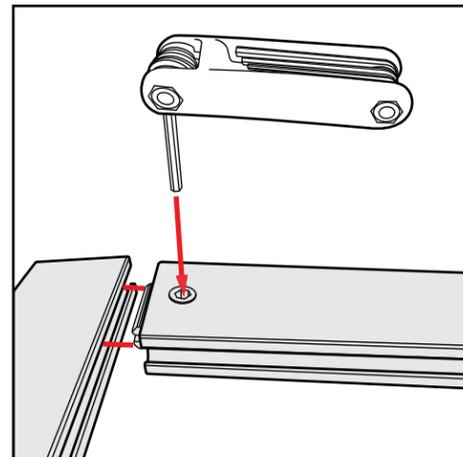

Extrusion & Lock Connection

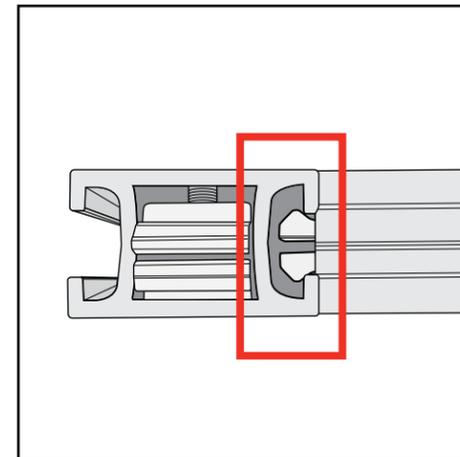

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED





ALL CONNECTIONS MUST
BE TIGHTLY SECURED

Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

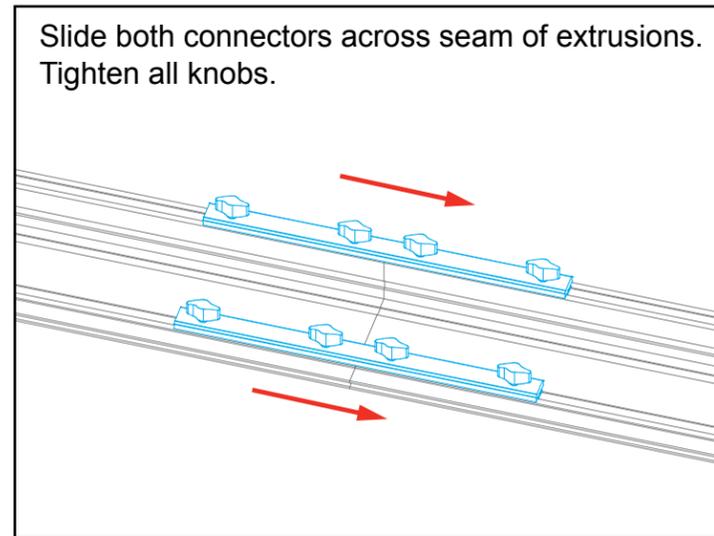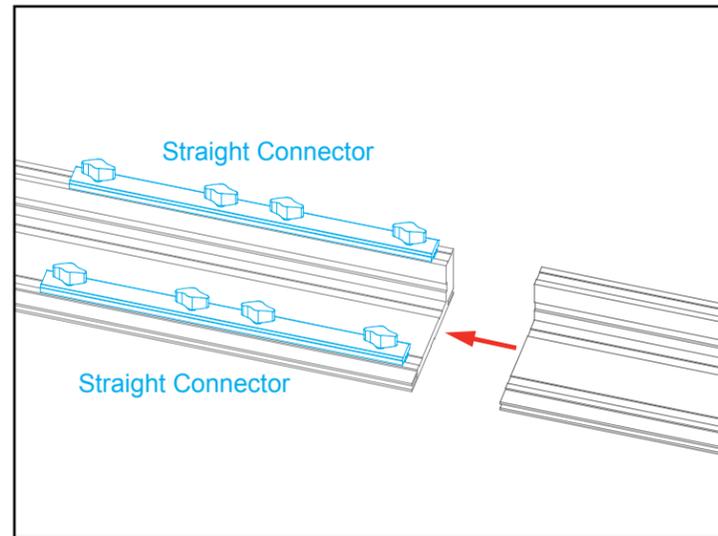

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

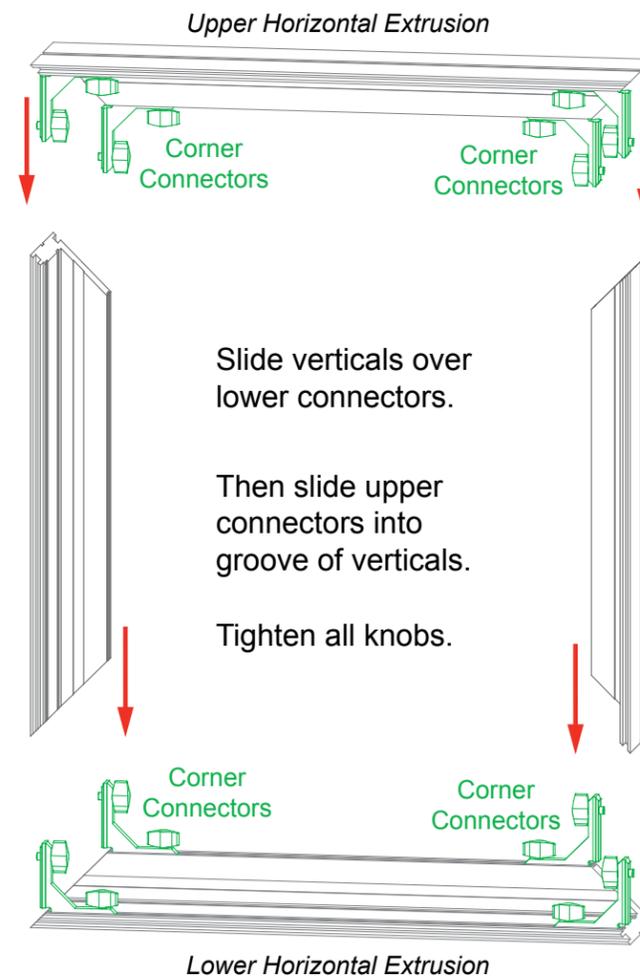


Adjust connectors if necessary to prevent gaps in connection.

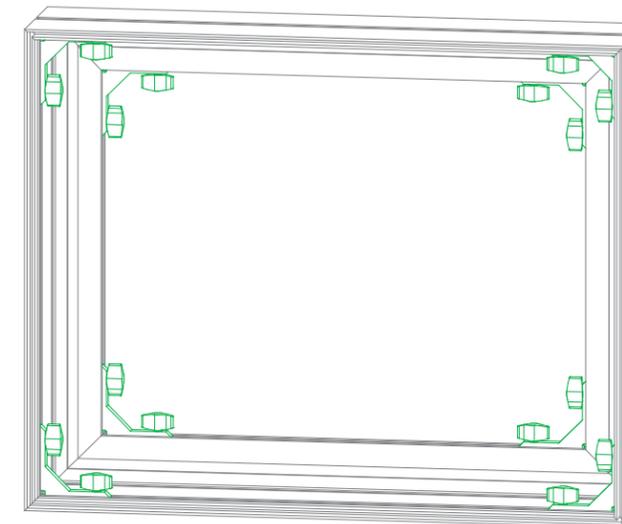

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.

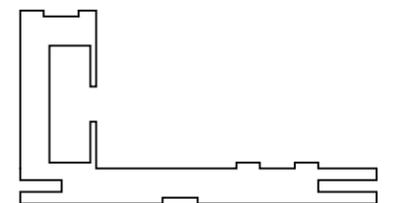


CEI110 Profile


The Perfect Fit

SEG Graphic Installation *in 3 Steps*



STEP 1: Attach Corners

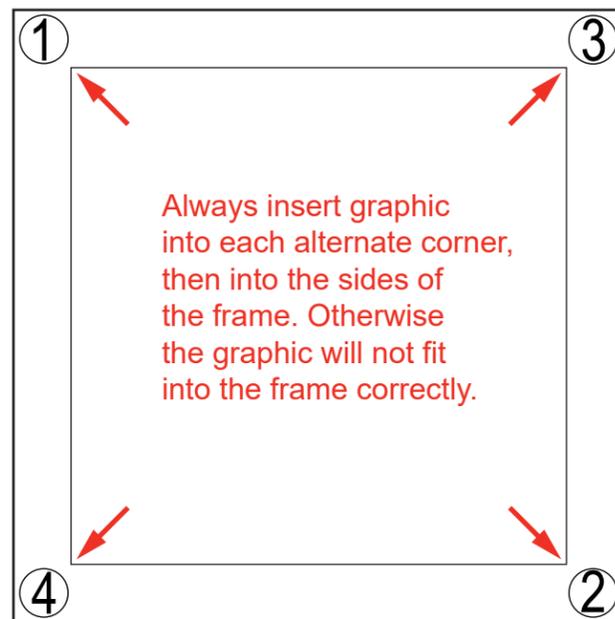

STEP 2: Attach Middle

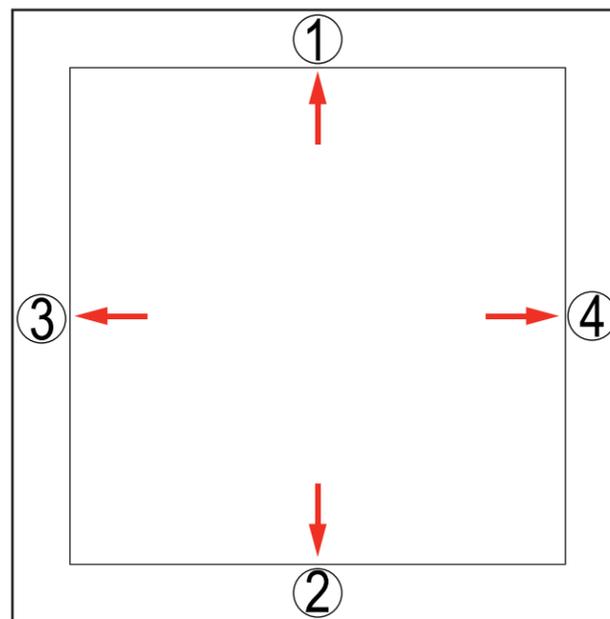

STEP 3: Attach Sides

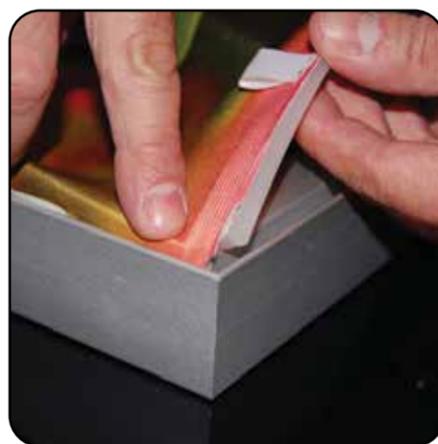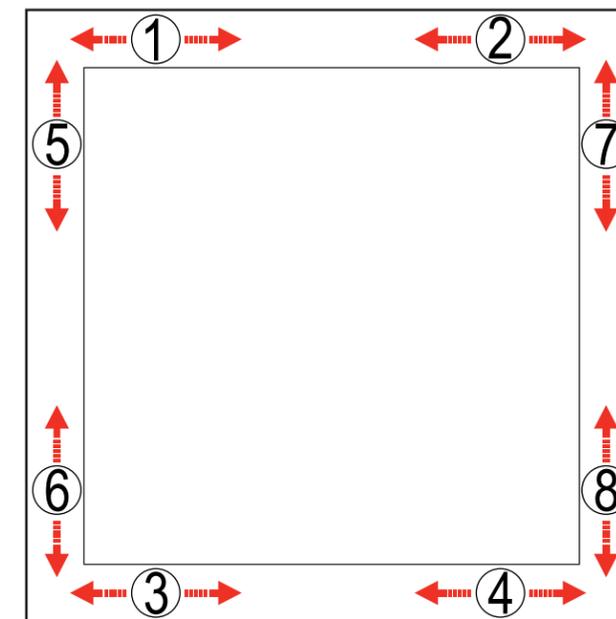

Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.

Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Once the welt is fully inserted on all sides, smooth out edges as needed for a perfect fit.




To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.

Install video:



CRATE PACKING

*Retain all packing materials.
DO NOT DISCARD.*

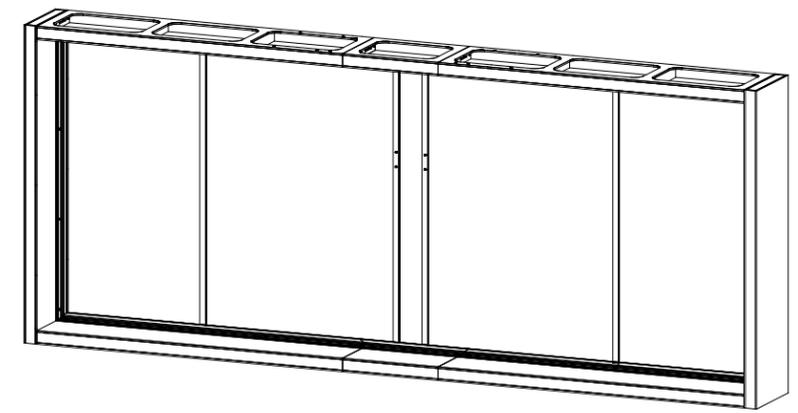


Item	Qty.	Description
A	1	4"w x 94"h x 23.5"d Wall Panel w/ CEI110
B	1	4"w x 94"h x 23.5"d Wall Panel w/ CEI110
C	1	96"w x 4"h x 23.5"h Floor Panel w/ CEI110
D	1	30"w x 4"h x 23.5"h Floor Panel w/ CEI110
E	1	96"w x 4"h x 23.5"h Floor Panel w/ CEI110
F	1	96"w x 4"h x 23.5"h Ceiling Panel w/ CEI110
G	1	30"w x 4"h x 23.5"h Ceiling Panel w/ CEI110
H	1	96"w x 4"h x 23.5"h Ceiling Panel w/ CEI110
1	1	86"h CEI110 Vertical Extrusion
2	1	86"h CEI110 Vertical Extrusion
3	1	96"w CEI110 Horizontal Extrusion
4	1	33.647"w CEI110 Horizontal Extrusion
5	1	96"w CEI110 Horizontal Extrusion
6	1	96"w CEI110 Horizontal Extrusion
7	1	33.647"w CEI110 Horizontal Extrusion
8	1	96"w CEI110 Horizontal Extrusion
9	2	82.353"h Z45 Vertical Extrusion
10	2	82.353"h Z45 Vertical Extrusion

- Steps:
- 1) Attach CEI110 extrusions [1] through [8] to panels [A] through [H] as shown, using **Bolt to T-Nut Connection**.
 - 2) Assemble panels [C-D-E] & [F-G-H] between panels [A] & [B] using roto cam locks See **Roto Cam Lock Connection** detail.
 - 3) Connect CEI110 extrusions together using straight and corner connectors. Refer to the **CEI110 Frame Assembly general information page**.
 - 4) Attach verticals [9,10] between horizontal extrusions on panels, as shown.

When assembled

NOTE:
All CEI110 extrusions stay attached to panels.
DO NOT REMOVE

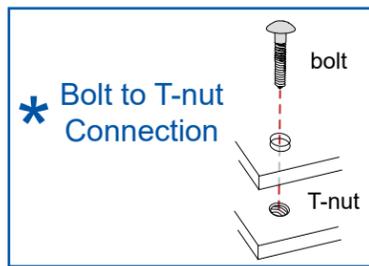


*** Roto Cam Lock Connection**



Step 1

Step 2

Place hex tool in hole on side of panel. Rotate to activate lock & secure panels together.

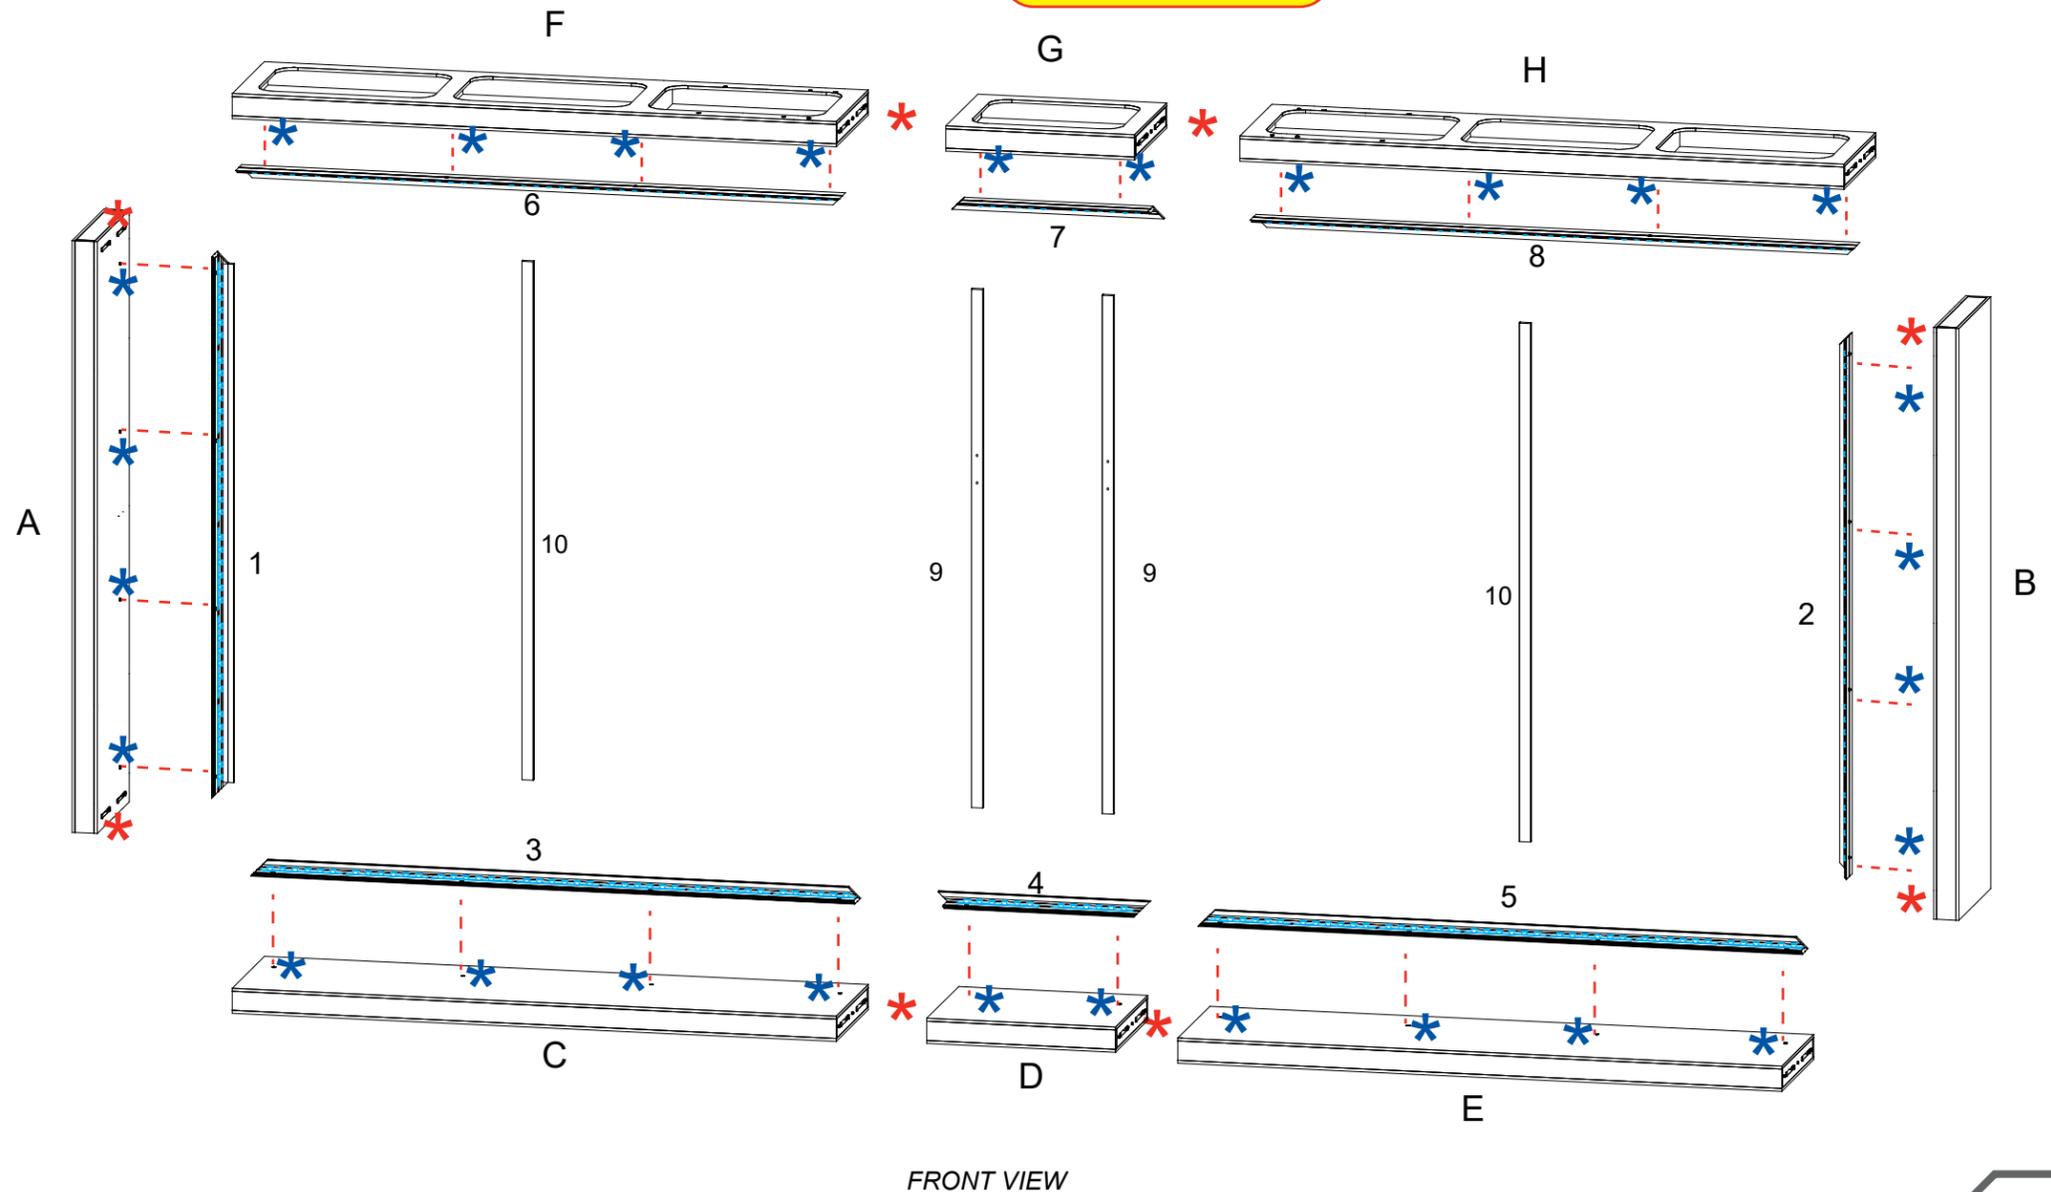


Steps:
1) Connect power cords to Supernova lights, as shown.

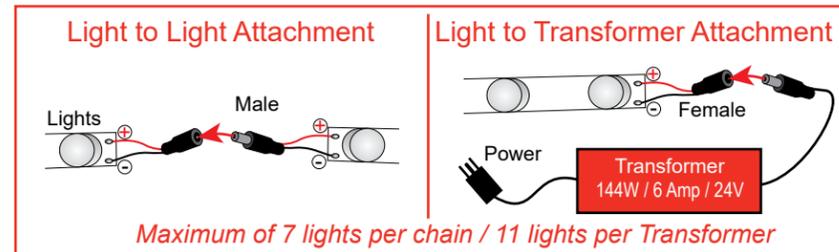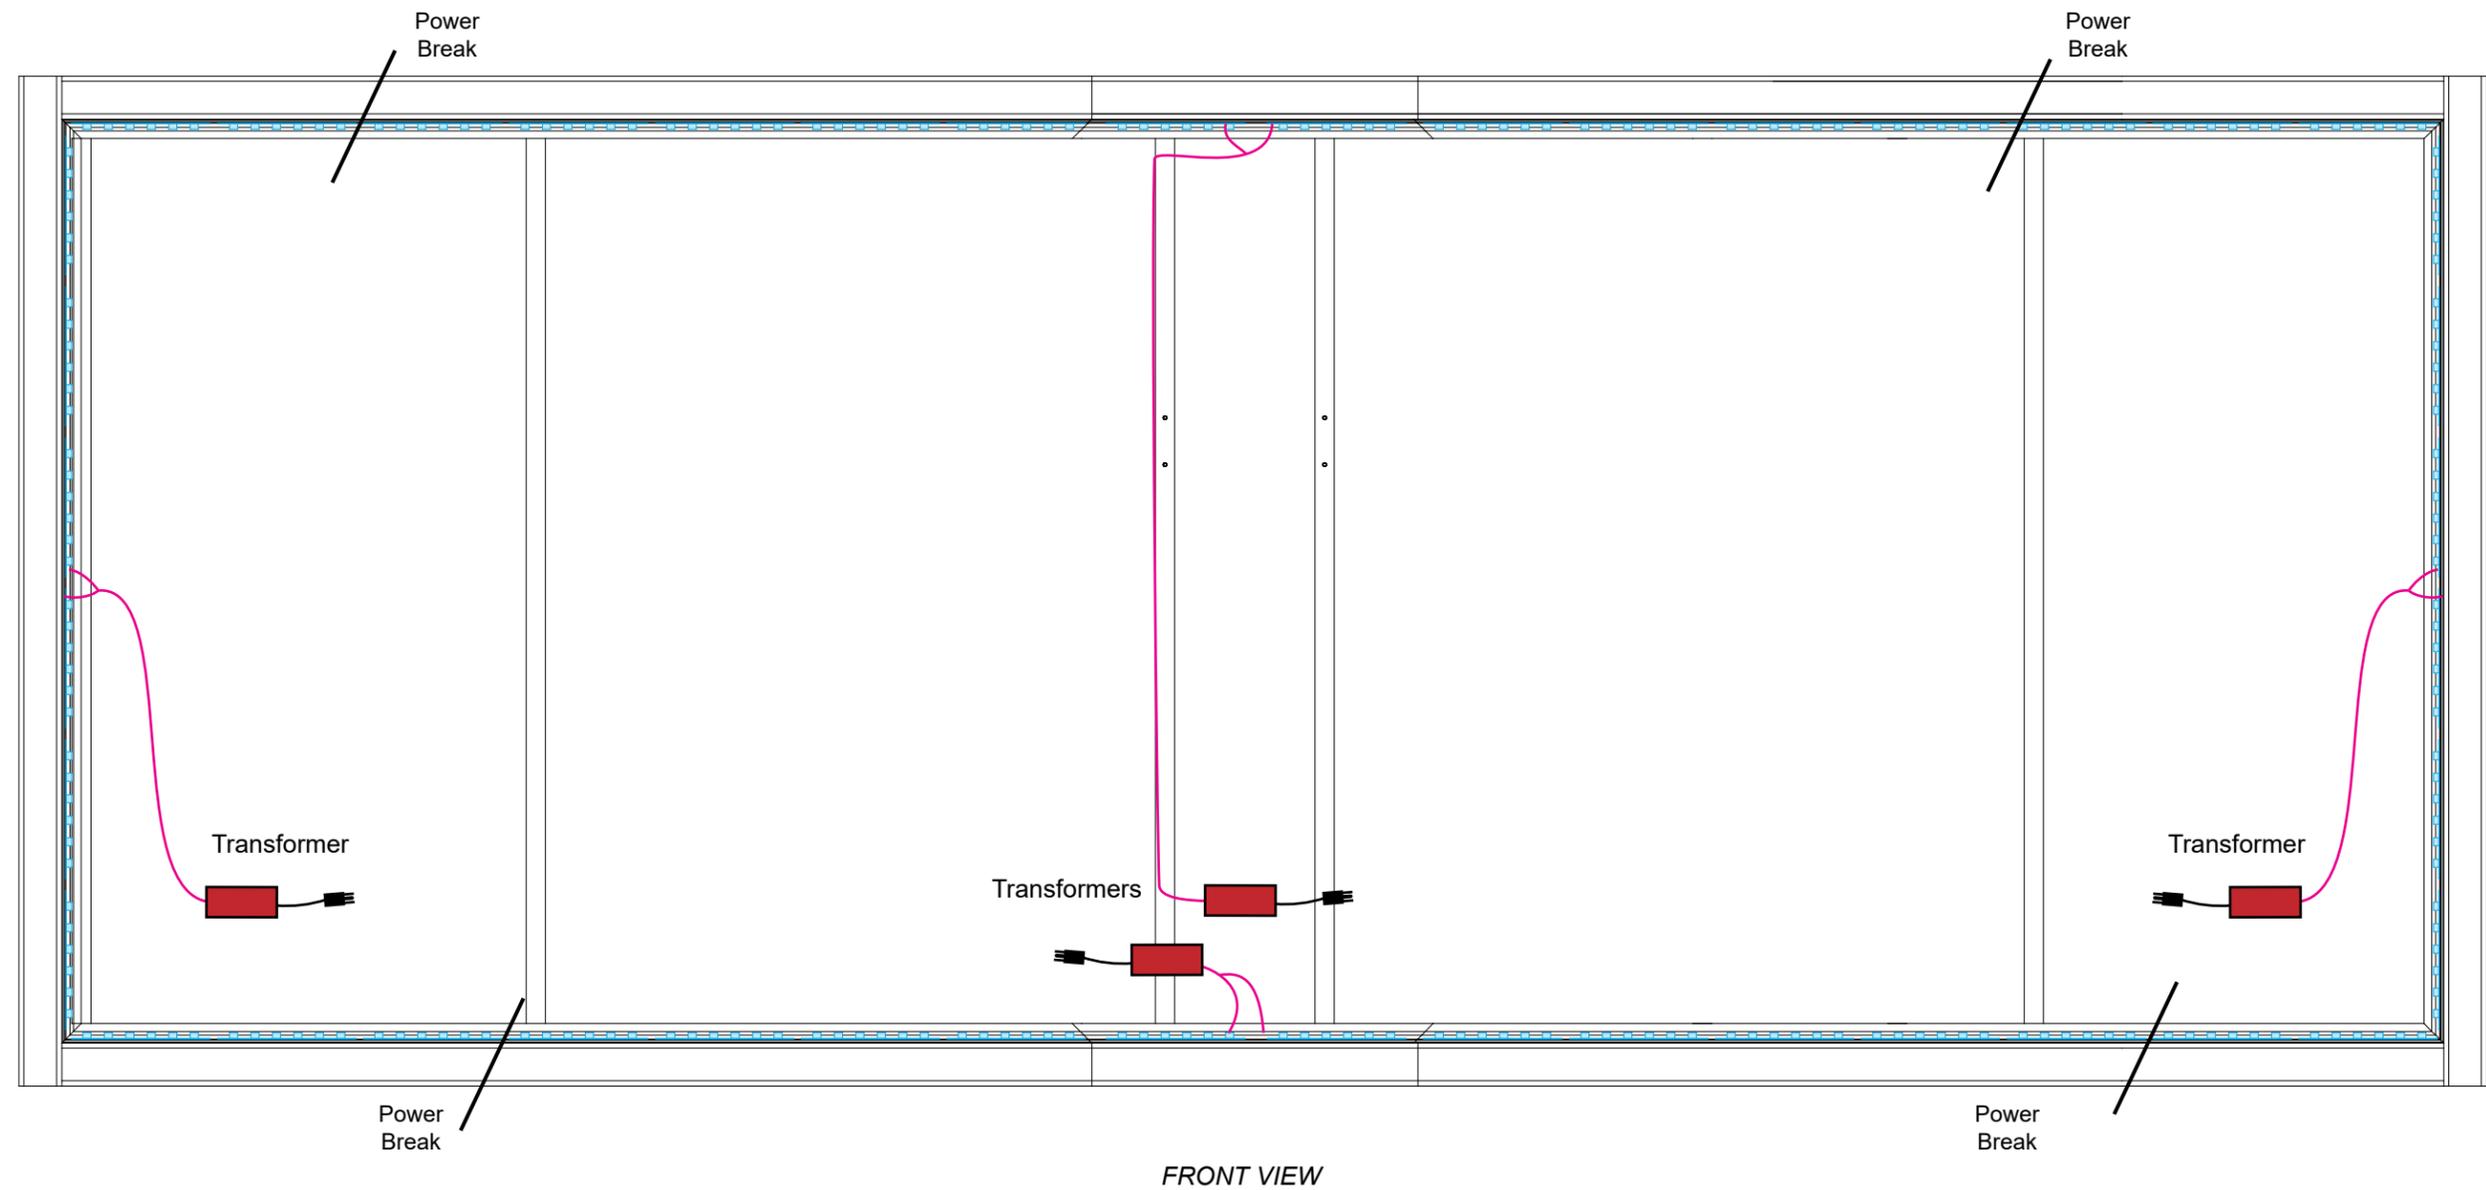

Steps:


- 1) Apply SEG Graphic to front of lightbox. Refer to the *SEG Installation general information page*.
- 2) Install Monitor Mount to backwall verticals. See **Monitor Mount Attachment** detail.
- 3) Apply SEG Blocker to back of lightbox.

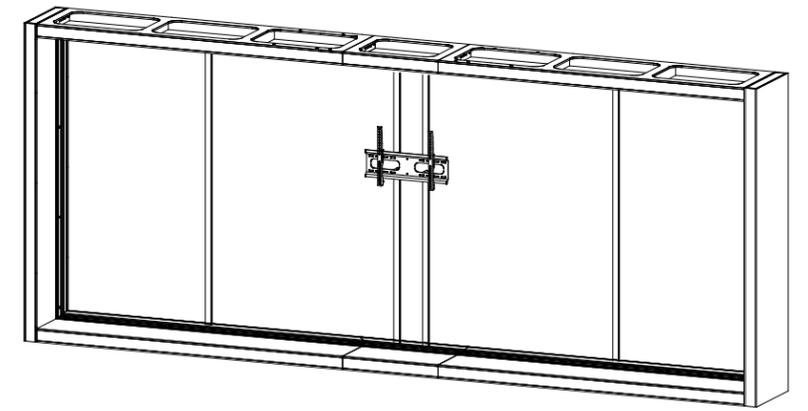


When assembled

*** Monitor Mount Attachment**

Attach Monitor Mount to vertical extrusions using standoff barrels, bolts & wing nuts.



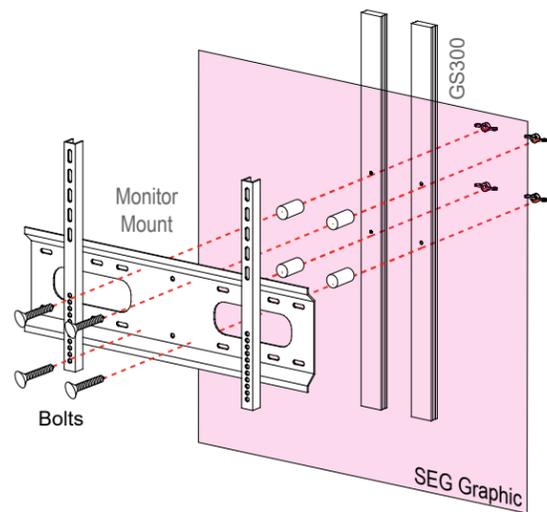


Note: Monitor mounts install through SEG graphic.

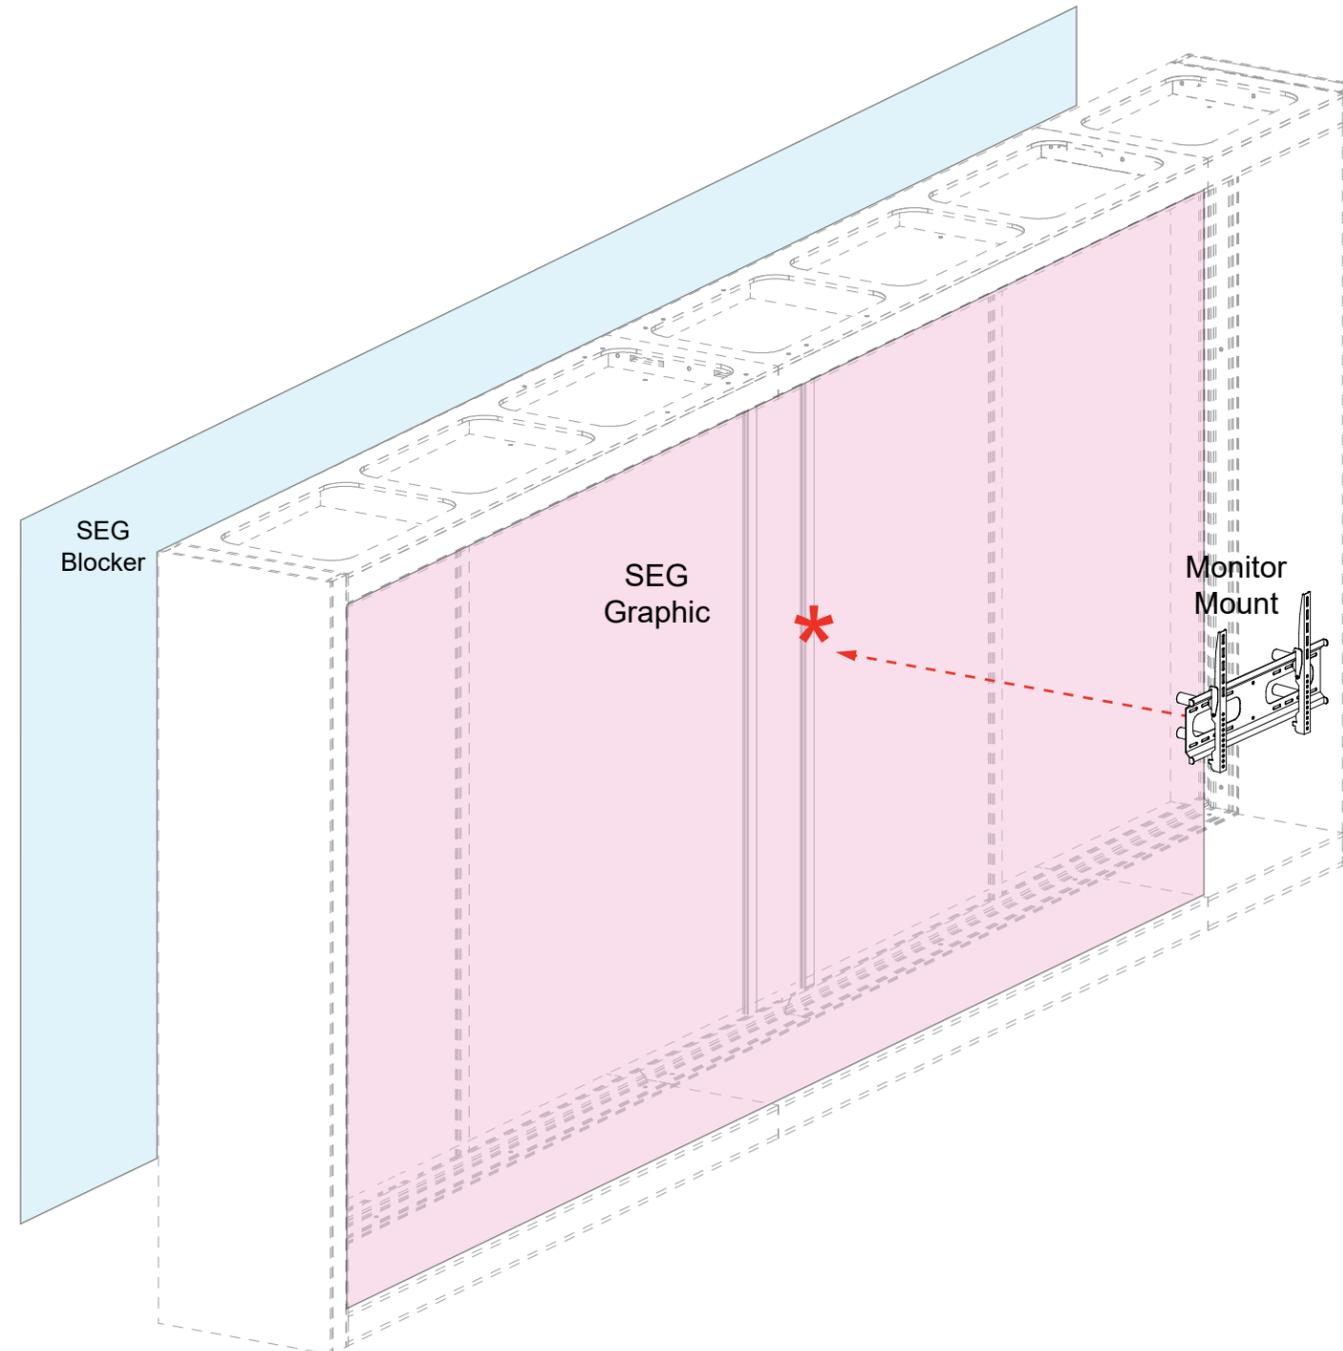


Steps:

1) Connect transformer to LED lights behind front panel.

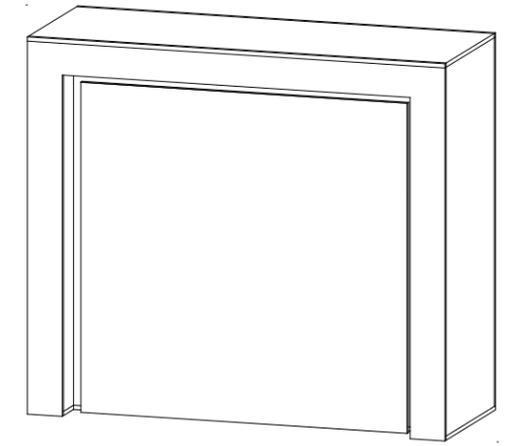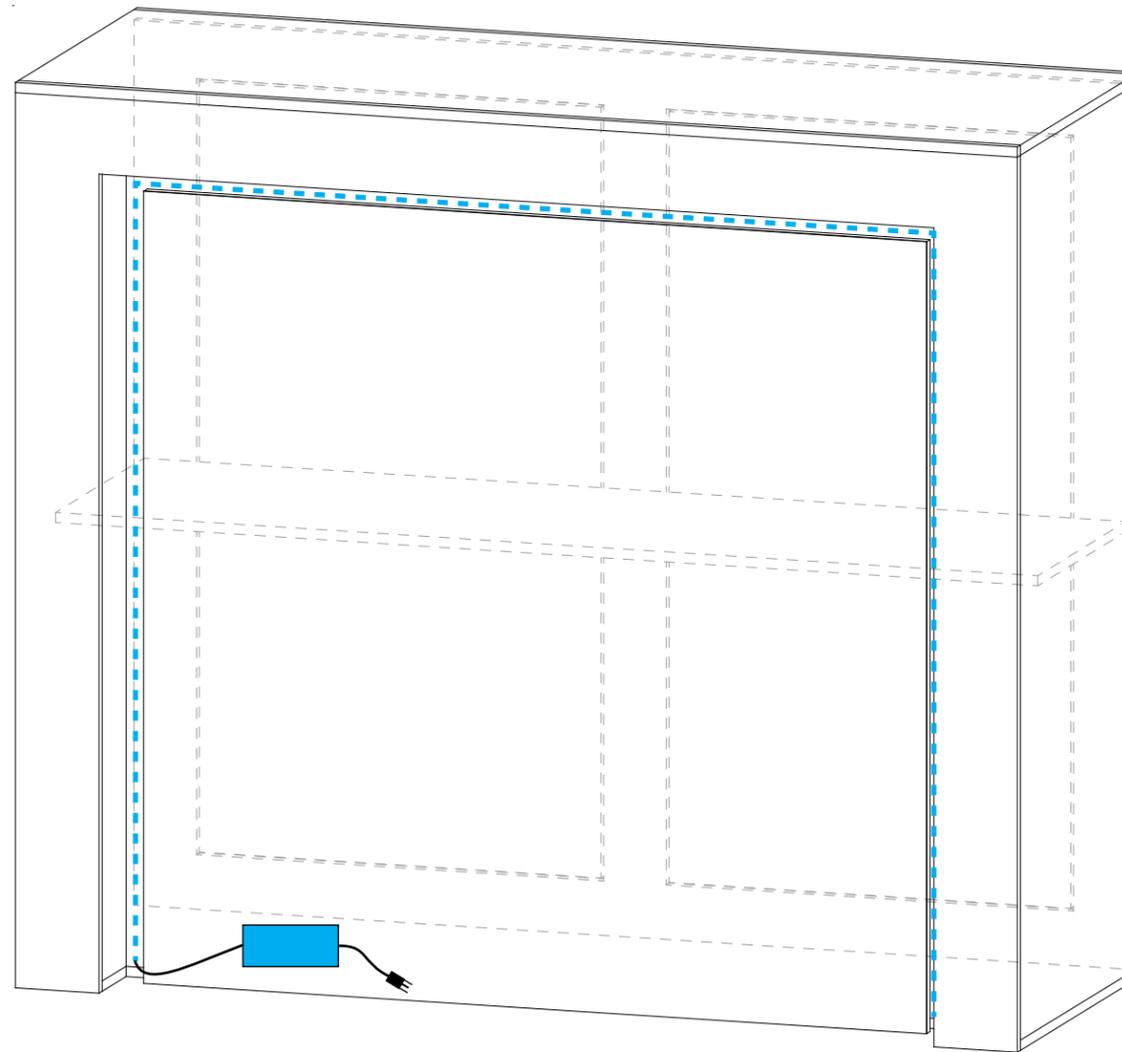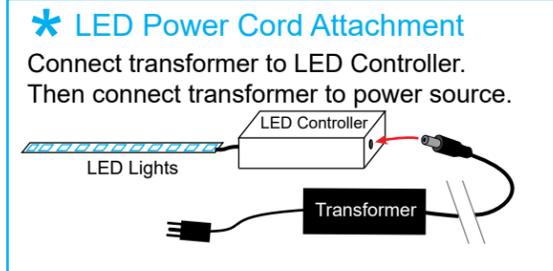

Completed Front View

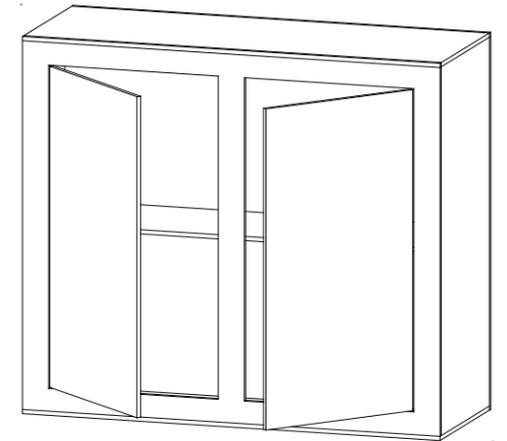

Completed Back View